


Dimensions in mm

- Load cells designed to work and compression.

Wiring diagram

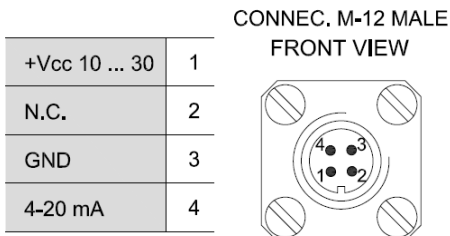

Technical characteristics			
Nominal load (nL)	0 ... 800t 0 ... 1000t	Maximum working load	150 % F.S.
+ Vcc	0.....30 Vdc	Limit safe load	200 % F.S.
Nominal signal	4-20 mA	Safety against deformation	200 % F.S.
Operation temperature	-40 ... +70 °C	Safety against break	250 % F.S.
Accuracy	± 0.1 % F.S.	Protection class	IP 67
Histeresys	0.07 %	Material	Alloy steel
Linearity deviation (in working range)	± 0.065 % F.S.	Surface treatment	Alloy steel & nickel coated, Stainless
Minimum insulation resistance (V.Test = 100V)	4 GΩ		